


# CS-NP24G-900

Power-over-Ethernet Injector Hub (PoE Standard)

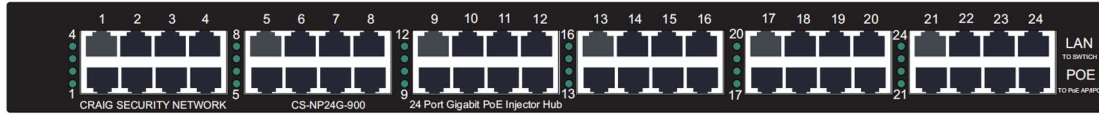


## Description

The CS-NP24G-900 is a 24 Channels Mid-spans High PoE Injector Hub offer a compact and cost effective solution for remote powering of wireless LAN (WAN) access points, IP Surveillance cameras, VoIP telephone and other low port density installation as well.

The CS-NP24G-900 Mid-spans High PoE Injector Hub eliminates the need for external power supply and its associated AC/DC power cabling, providing a compact, affordable, safe and reliable power solution over existing Ethernet infrastructure.

## Application

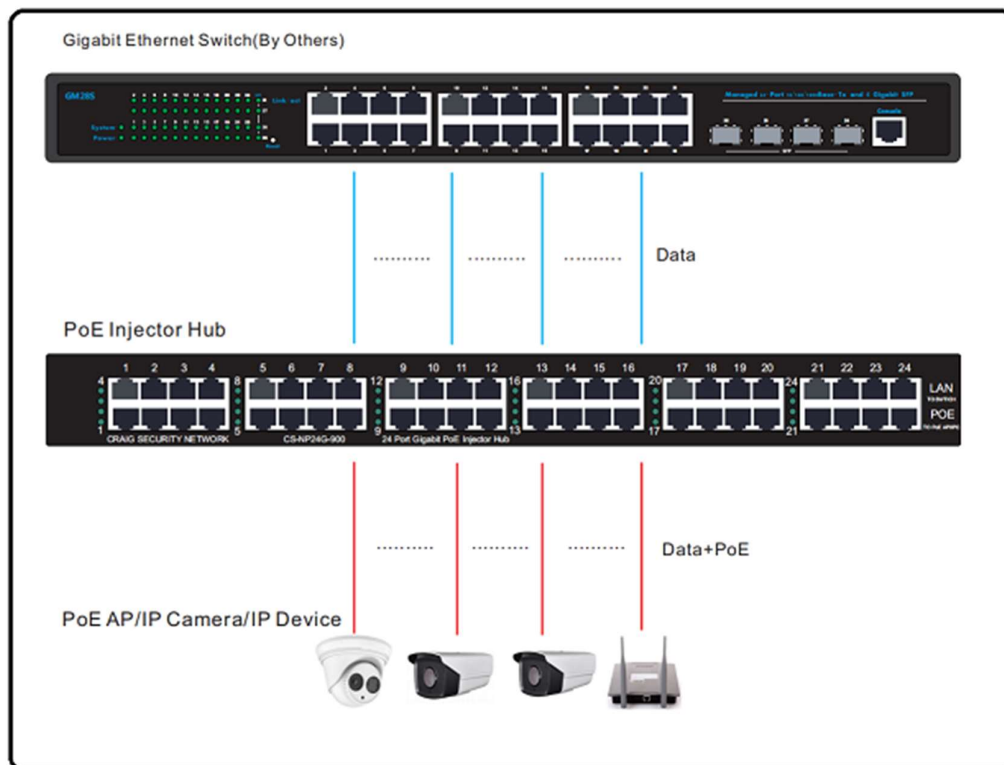

## Features

- Support PoE power up to 37.5Watts per Channel/Port
- Supports 10/100/1000Base-T applications
- Provide LED indicators to show power input indication
- Built-in high efficiency 900 Watts Super high power supply with fan cooling
- User-friendly with plug-and-play installation
- Surge protection provided

## Specifications

Item	Description
No. of channels	24 Channels
Data Rates True Put	10/100/1000Mbps
Power over Ethernet Output	Pin Assignment and Polarity: 1/2 (+), 3/6 (-),4/5(+),7/8(-) Continued Output Power Voltage: 53Vdc Max. Max. Power available on Each Port: 37.5Watts
Input Power Requirements	AC Input Voltage: 100 to 240 Vac AC Input Current:10A 100-240 Vac AC Frequency: 50 / 60 Hz
Dimensions	440 (L) X 310 (W) X 44 (H) mm
Indicators	User Indicator: Channel Power 1~24
Connectors	Shielded RJ-45, EIA 568A and 568B
Environmental Conditions	Operating Ambient Temperature: -10 to 45°C

	<p>Operating Humidity:</p> <p>Maximum 80%, Non-condensing</p> <p>Storage Temperature:</p> <p>-20 to 70°C</p> <p>Storage Humidity:</p> <p>Maximum 90%, Non-condensing</p>
--	--

### **Order Information**

CS-NP24G-900	24 channels 10/100/1000M PoE Injector (PoE standard) 37.5W/CH, Total power 900W
--------------	--

Craig Security Network (S) Pte Ltd

1 Kaki Bukit Road 1, #02-48 Enterprise One Singapore 415934

Tel: +65.6489.1710      Website : [www.csn.sg](http://www.csn.sg)

---