



Craig Security Network


www.csn.sg



CS-7601TW

Ethernet & PoE over 2-Wires Transceiver

- Transmit 10/100 BaseT Full Duplex Ethernet up to 600m over 2-Wires cable.
- 48-56Vdc is distributed over the 2-Wires to all connected equipment. Power support PoE, PoE+ or Ultra PoE Camera (or other PoE devices), up to 60 watts.
- 2-Wires transceiver at the network-end can support multiple remote transceivers / IP cameras by using Daisy Chain method.
- Easy configuration, no PC required.
- Plug and Play Technology.

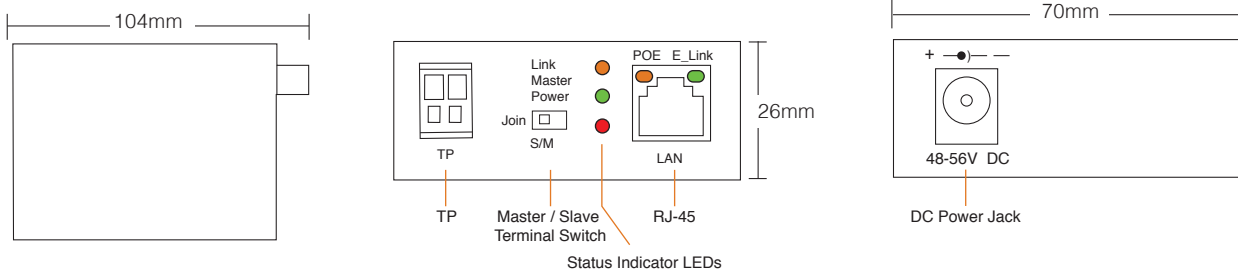

Technical Specification

Name	Model / Type	Specification
Product	Model No.	CS-7601TW
Coaxial-line Interface	Standards	Base on up-to-date advanced IEEE P1901 for ethernet over 2-Wires Cable Application with raw data rates up to 90Mbps
	UTP Cable Device	CR700/CR100
	Connector	2-Wire on device
Line Rates	Phy Rate	Maximum Link Rates 90Mbps
Ethernet Interface	Standards	ISO / IEC 802.3 (ANSI / IEEE 802.3i)10BASE-T Ethernet
		IEEE 802.3u , 100BASETx , Fast Ethernet
		IEEE 802.3ab 100BASE-T
	PHY Connection	TSZ7042 , 10BASE-T , 100BASE-T , With Auto-detect Auto MDIX
	Connector	2-Wires Connector for 10BASE-T , 100BASE-Tx Ethernet Interface
LED Indicators	RJ45-DATA	Data Link / Green
	RJ45-PoE	PoE On / Yellow
	Power	48-56Vdc Link/Red
	Join	Link/Yellow
Encryption	Encryption method	128-bit AES Link Encryption with key management for secure. Power line communication.
IGMP	IGMP Protocol	Supports IGMP multicast sessions ToS , CoS and IP port number packet classification
PoE	Standards	IEEE 802.3 at / af Both supports
	Maximum Power	Up to 60W
System Power	Voltage	AC/DC Power adaptor , AC 90 ~ 260V , 50Hz / 60Hz , 48-56Vdc, 2A
Agency Approval	AC Line Safety	UL 60950-1 and CE60950 for ITE Devices, CAS, TUV
	Emissions	FCC Part 15 Sub Part B for Class B
	Surge Protection	4KV / 1.2 , 50 us , 2KA / 8, 20uS for AC/DC Adaptor
Mechanical	Dimensions	With Bracket : 104 X 95 X 26mm Without Bracket : 104 X 70 X 26mm
	Weight	180g
Enviroment conditions	Operatiiong Temperature range	-20°~75°C
	Humidity Range	10% ~ 90%
	Storage Temperature	-40 ~ 80 °C

Up To
1km
Coax

PoE distance
up to 1.000m
on Coax

90Mbps
per
Camera

Bandwidth
up to
90Mbps

Up To
600m
2-Wire

PoE distance
up to 600m
on 2-Wires cable

Ultra PoE
up to
60W

Supports PoE,
PoE+. or Ultra
PoE up to 60W

Up To
800m
UTP

PoE distance
up to 800m
on UTP cable


Ethernet
10/100

Transmit full
duplex 10/100
Ethernet

1:3

Multi-connection
for both Tx / Rx
on Coax /
2-Wires cable

Application Diagram

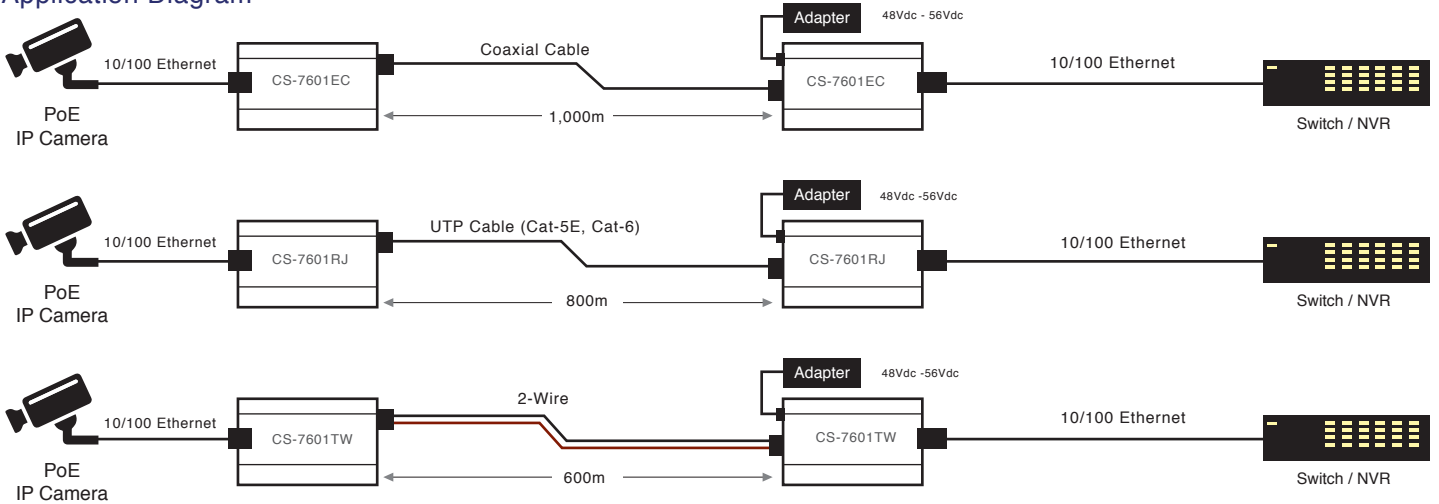

This product has passed all of the required tests and comply the regulation of RoHs certification.
CE-EN 60950-1/EN 55032 / EN 55024, FCC Part 15B Class B

*Above spec may be differnet by installation environment.